



PRESSURE DROP - FOR WATER AT 15.6°C


CLASS 150/300

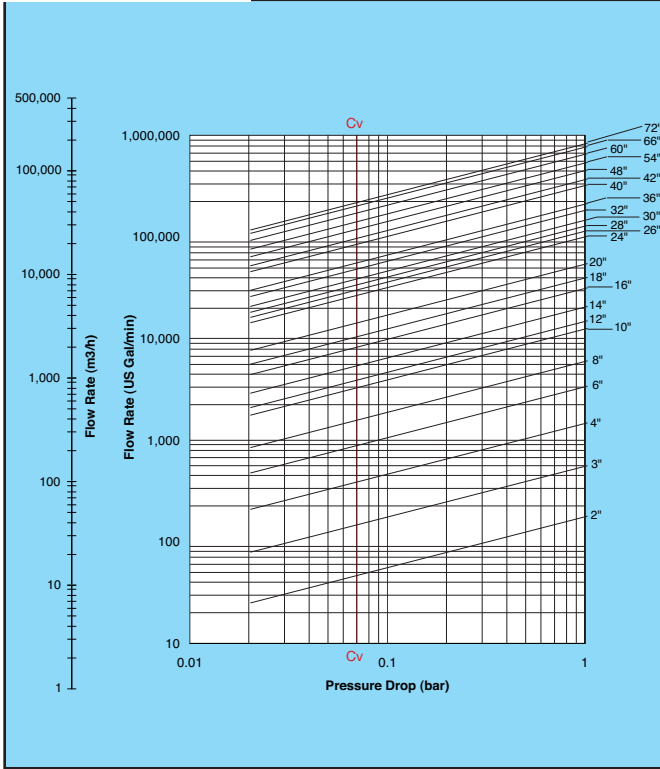


CLASS 600

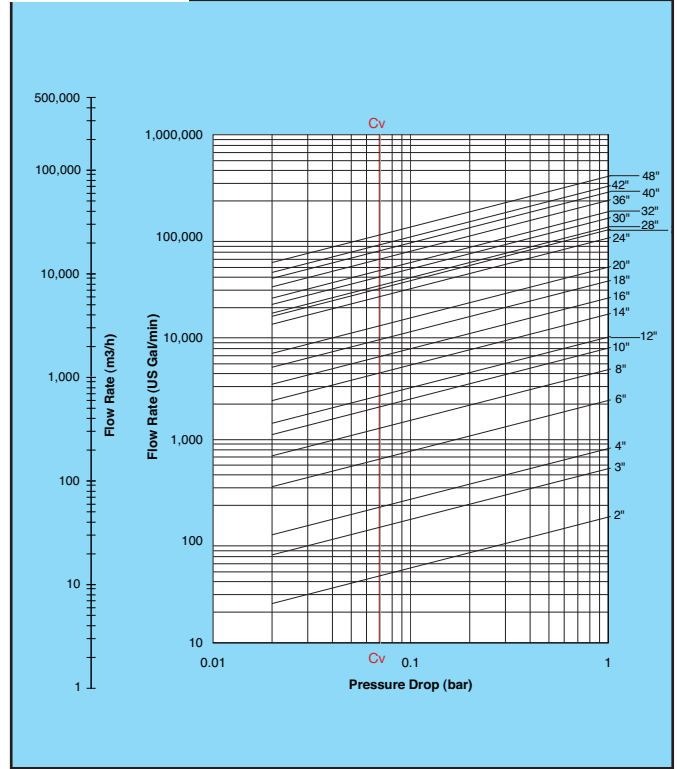

CLASS 900/1500

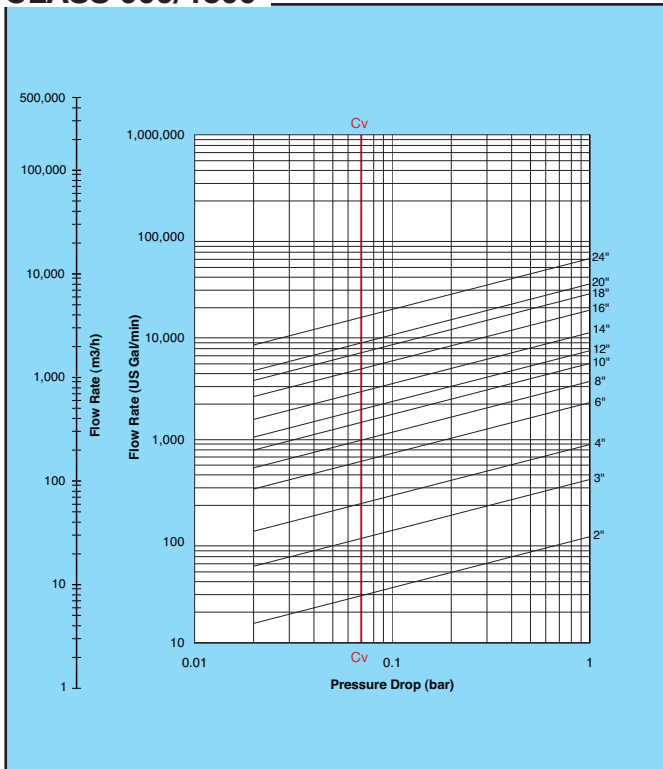

CLASS 2500

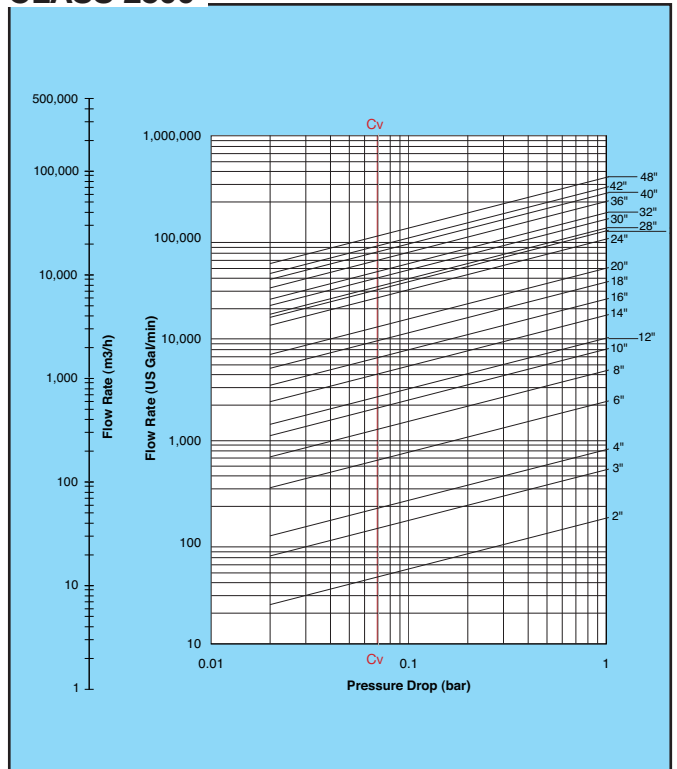

- Valves fitted to larger bore pipes will have lower pressure drops.
- For butt weld end Types BWR & BWA and hub end Type BHR (R) please refer to Goodwin for Cv values.

- Pressure drop versus flow, as depicted in the above graphs, have been established following tests carried out both at Delft Hydraulics Laboratories and from the flow test rig at Goodwin's factory. By combining these test results with area ratios a complete range of test results have been extrapolated.